

Art. SP 24 - M Canale U



©2017 - FRATELLI COMUNELLO S.P.A. - All rights reserved
Via Cassola, 64 - 36027 Rosà (VI) Italy
info@comunello.it www.comunello.com

EN

USE: Monorail for carriages.

TYPE: Monorail for steel carriages.

FIXING: For fixing on special supports with 600 mm interaxis.


MATERIAL: Electrogalvanised steel.

RECYCLING: Disposal as ferrous material in accordance with the current laws in the country of installation.

PARTS SUBJECT TO WEAR: Rail and wheel contact surface.

IMPORTANT: The manufacturer reserves the right to modify the characteristics of the product as required without notice. The manufacturer declines any liability for even partial modifications to the product, and the declared performance values are valid only if the installation procedures are carried out by qualified personnel.

TECHNICAL CHARACTERISTICS	
SP 24 - M Canale U	
WEIGHT PER METRE	2,22 Kg/m
COMBINED CARRIAGES	ECO KIT 4C - M
COMBINED SUPPORTS	22 MEDIUM
	23 MEDIUM
LOAD CAPACITY: 450 Lbs	
MAINTENANCE FREQUENCY	
LOW USE < 25 OPERATIONS/DAY 1 YEAR*	HIGH USE > 50 OPERATIONS/DAY 6 MONTHS*
Clean the inside of bottom edges of monorail	
Check for any deformation on body.	
*The scheme refers to a normal workplace (not marine or particularly aggressive environments).	

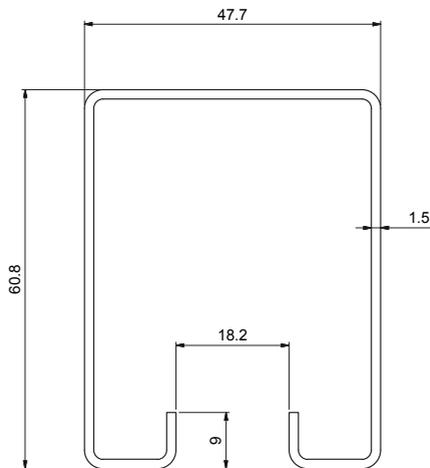

Art.		Code			
SP-24-M CANAL A U	L=1830 (6')	cod. 10200580 001	450 Lbs	1	4,068Kg
SP-24-M CANAL A U	L=2440 (8')	cod. 10200581 001	450 Lbs	1	5,805Kg
SP-24-M CANAL A U	L=3050 (10')	cod. 10200582 001	450 Lbs	1	7,256Kg
SP-24-M CANAL A U	L=3660 (12')	cod. 10200583 001	450 Lbs	1	8,707Kg

All pictures, technical drawings and related specifications belong to Fratelli Comunello Spa and they are defended by rules of copyright. All uses not expressly authorized will be legally prosecuted. Product specification are subjected to change without notice.